

The Scanwill MP Hydraulic Pressure Intensifiers in Cylinder Test applications



More Pressure. More Power



The MP-T intensifier (in-line)




The MP- intensifier (cetop / NG6)




The Scanwill MP- intensifiers are used to increase the pressure from an HPU, typically 175 bar to end pressures in the range 350 - 500 bar

350-500 bar

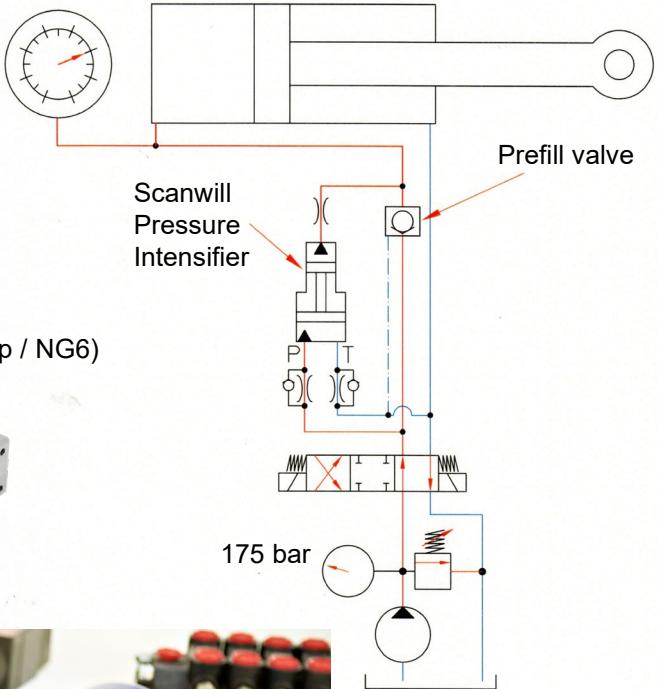

The MP-M intensifier (in-line)

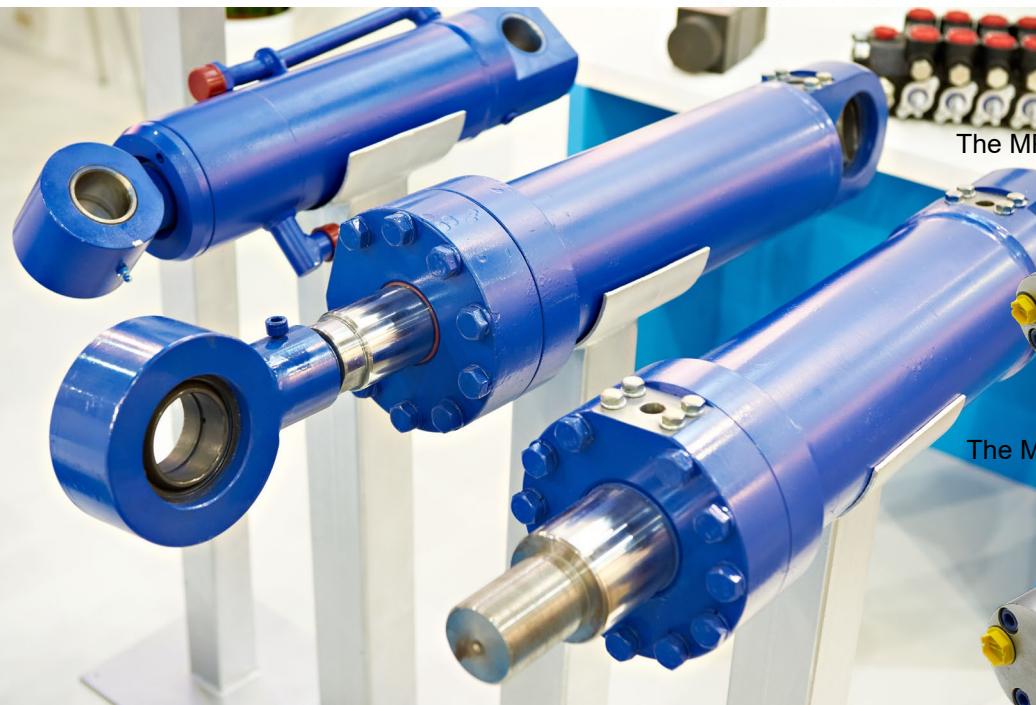

The MP-L intensifier (in-line)



More information on www.scanwill.com

The Scanwill Pressure Intensifiers allow to keep the energy consumption low, contributing to reach goal no. 12 in the world sustainability target.

